ASAFETY FIRST



BAC-SAVR FORKS


BAG-SAR FORKS FAST-SAFE-EASY

FOR: FORK TINE ADJUSTMENTS

*PATENT PENDING

ONE BACK INJURY AND WORKMANS COMP CLAIM CAN COST YOU \$\$\$

SAFETY WHEN ADJUSTING TINES. ADJUSTMENT TOOL SHOWN
IS STORED ON BACKSIDE OF
END PLATE / FRAME

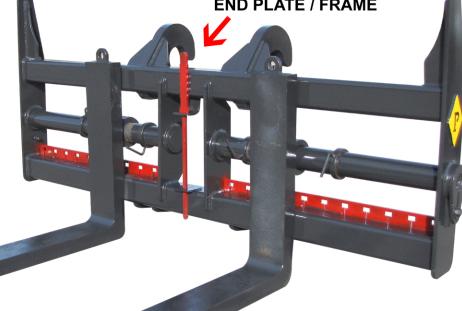

See Video On





INSTRUCTIONS

- 1.) Be sure fork tine shaft is greased before adjusting.
- Remove adjusting lever from its holder on the fork frame and then position the fork carriage in the dump position w/ the fork tips just off the ground.
- 3.) Turn off loader and set parking brake.
- 4.) Approach the fork from the front side, loosen the fork locking rings on the tine hanger shaft. Then insert adjusting lever into the grid and pull horizontally left or right to position fork in the desired position. Reset locking rings.





